

ET2831HP-240 VAC 3PHASE 41 AMPS

240 VAC THREE PHASE 41 AMPS TOP

WIRED DIRECT
USE THREE FUSED CIRCUITS
USE FUSED SAFETY
DISCONNECT




1690 WATTS

USE FUSED THREE PHASE INCOMING POWER CIRCUIT
OR THREE SEPARATE FUSED 24 AMP FUSED CIRCUITS
WITH FUSED SAFETY CUTOFF
SWITCH NEAR KILN.

FUSE NOT REQUIRED
WHEN USING CLASS 2
TRANSFORMER ABOVE
ABOVE 1/2 AMP

41 A THREE PHASE OR THREE CIRCUITS
24A, 24A, & 24A RESPECTIVELY

COMPLY WITH NATIONAL
ELECTRIC AND LOCAL
CODES FOR WIRE SIZE.

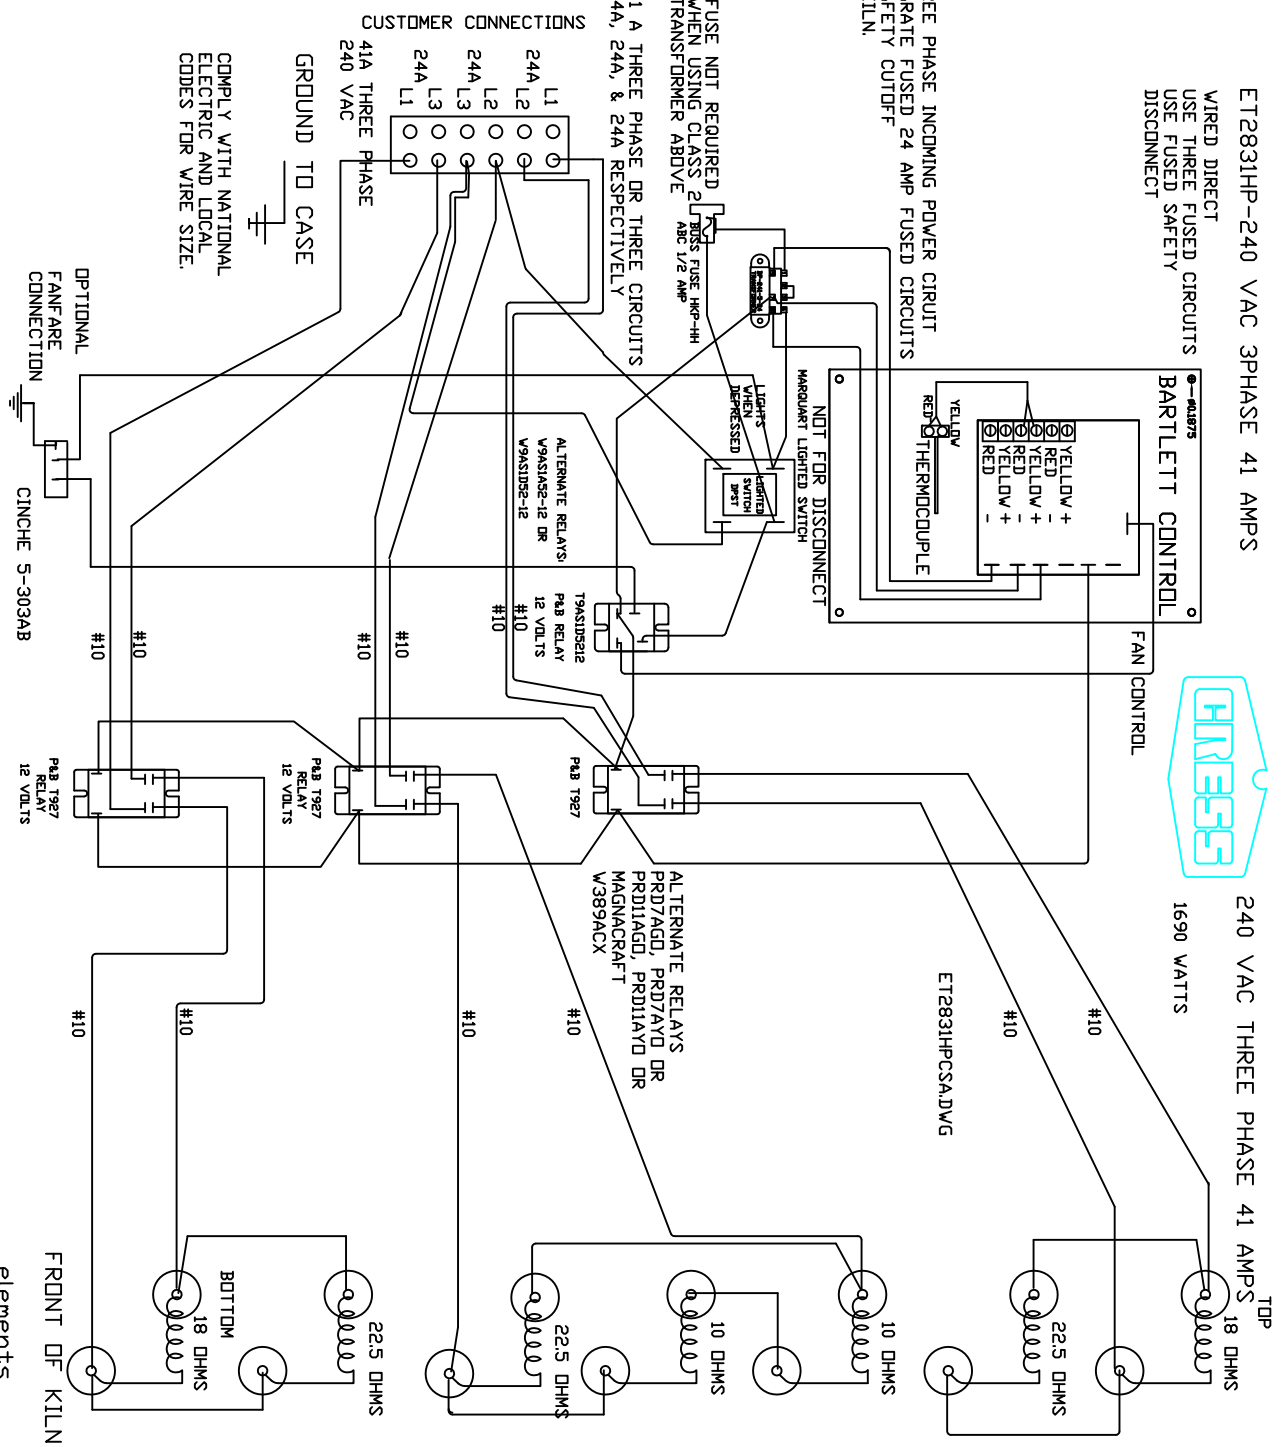

FRONT OF KILN
elements